

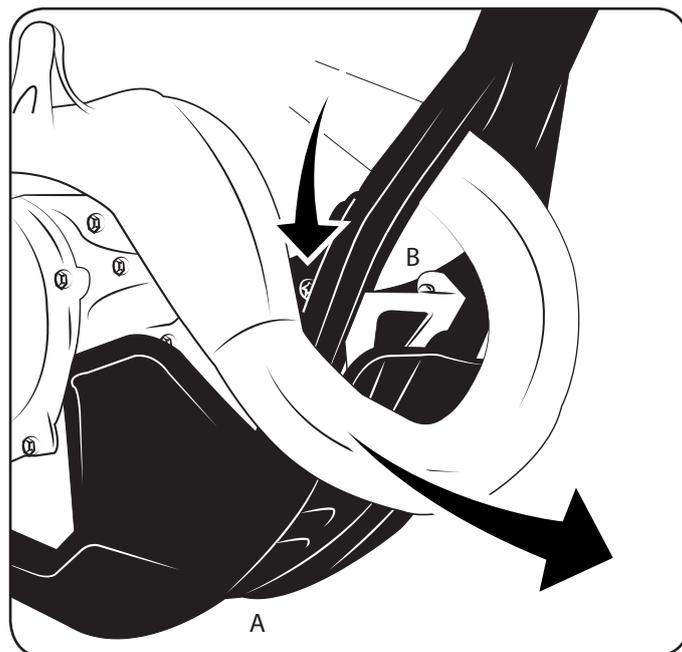



COD. 500005279 REV 3

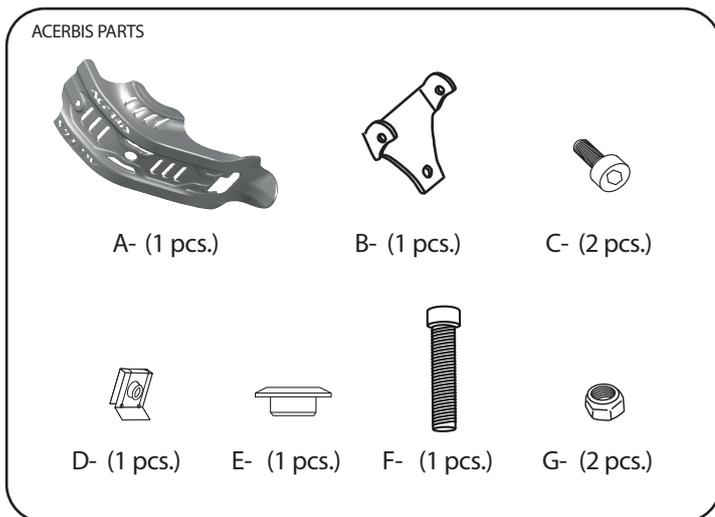

1. Scollegare lo scarico e spostarlo avanti per facilitare il montaggio della staffa sul telaio.
 Disconnect the exhaust pipe and move it forward to facilitate the mounting of the clamp to the frame.

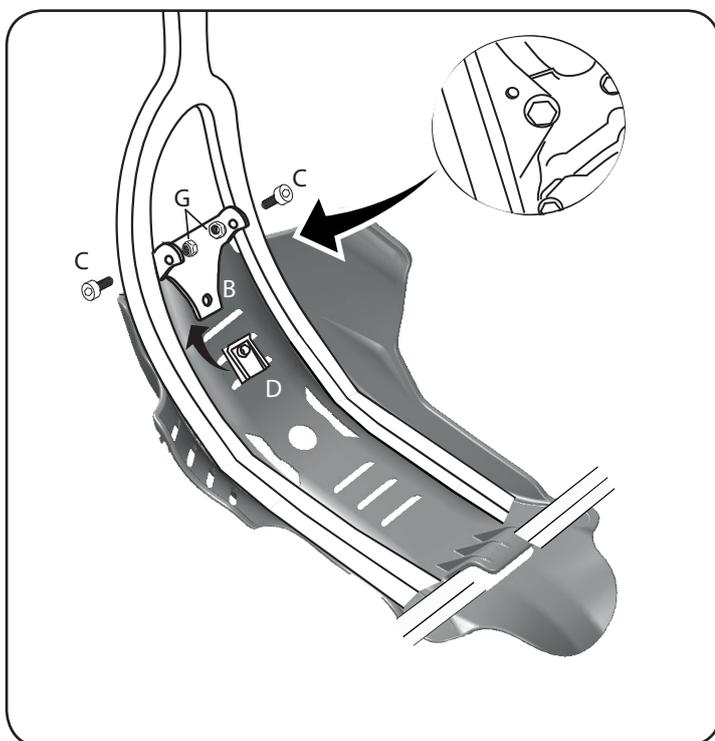

2. Assemblare la clips sulla staffa e fissare la staffa sul telaio come indicato.
 Assemble the clip on the clamp and place the clamp on the frame as indicated.

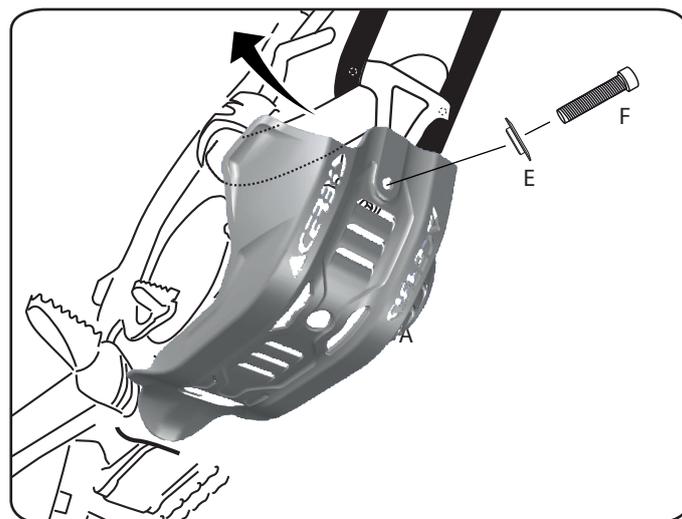

3. Avvitare il sottomotore al telaio.
 Screw the skid plate to the frame.

WARNING!

Use at your own risk. Check the security of your device before you ride. Be sure that you follow the instructions installing the Acerbis products. Do not ride if there is missing or damaged hardware. If this is the case, take the item immediately back to your dealer. Make sure the throttle and other controls are free every time you ride. Lack of attention to instruction and warning could lead to interference with the controls, loss of control, and an accidents. Acerbis recommends that installation must be done by a licensed mechanic and that only Acerbis original parts are used during fitting. Acerbis makes no guarantees or representations, express or implied, regarding the fitness of its products for any particular purpose. Acerbis makes no guarantees or representations, express or implied, regarding the extent to which its product protect individuals or property from injury or death or damage.